

## FEATURE 特性介紹

1. 首創全系列立柱（Z軸）採用超耐磨鋁合金，經特殊處理不易變形，搭配精密線性滑軌，操作簡便、精度更佳。
2. 首創全系列X軸、Z軸快速移動裝置，便捷性大幅提。
3. 首創全系列基座使用高剛性鋼板，經高溫燒焯以及強力珠擊，內應力徹底消除，變形量減到最低。
4. 首創DH-4400R與DH-6600R(X)軸採雙線性滑軌設計，保持絕佳穩定性，並延續快速移動裝置，操作順暢，得心應手。
5. 首創超輕量、超便利、超剛性、超美觀、超經濟的五大超製造概念。
6. 本產品已申請多項專利，任何仿冒必定追究。



### DH-6600R

X軸採用高精密雙線性滑軌設計  
X-axis equipped with high precision double linear guideway



### DH-4400R

X軸採用高精密雙線性滑軌設計  
X-axis equipped with high precision double linear guideway

| 機型     | Model           | DH-6600R   | DH-4400R   |
|--------|-----------------|--|--|
| 測量範圍   | Measuring Range | 直徑 Diameter (X):Ø600mm<br>高度 Height (Z):30~600mm | 直徑 Diameter (X):Ø400mm<br>高度 Height (Z):30~400mm |
| 數顯解析度  | Resolution      | X軸 X-Axis: 0.005mm<br>Z軸 Z-Axis: 0.005mm         | X軸 X-Axis: 0.005mm<br>Z軸 Z-Axis: 0.005mm         |
| 儀器外型尺寸 | Machine Size    | 長x寬x高 860x360x1060mm(LxWxH)                      | 長x寬x高 760x360x860mm(LxWxH)                       |
| 儀器重量   | Weight          | 90kg   | 80kg   |
| 裝箱尺寸   | Packing Size    | 1120x500x1290mm                                  | 1050x500x1110mm                                  |
| 裝箱後總重量 | Total Weight    | 145kg  | 135kg  |

## Professionally Manufactured

1. Z-axis column is made of super wear resistant aluminum alloy and treated specially to reduce the deformation. The precision linear guideway is equipped for higher accuracy and easily operation.
2. Both X-axis and Z-axis are equipped with rapid traverse equipment for higher moving efficiency.
3. High rigidity steel plate without any internal stress is used for the base to reduce the deformation amount to minimum.
4. The X-axes of DH-4400R and DH-6600R are equipped with double linear guideway for stable, smooth and fast operation.
5. With 5 manufactory conceptions: Lighter, more convenient, more rigidity, more artistic and more economic.
6. Construction and functions patented.



### DH-3400R

主軸錐度#40或#50  
Main axle's taper is #40 or #50



### DH-3300R

主軸錐度#40或#50  
Main axle's taper is #40 or #50

| 機型     | Model           | DH-3400R   | DH-3300R   |
|--------|-----------------|--|--|
| 測量範圍   | Measuring Range | 直徑 Diameter (X):Ø300mm<br>高度 Height (Z):30~400mm | 直徑 Diameter (X):Ø300mm<br>高度 Height (Z):30~300mm |
| 數顯解析度  | Resolution      | X軸 X-Axis: 0.005mm<br>Z軸 Z-Axis: 0.005mm         | X軸 X-Axis: 0.005mm<br>Z軸 Z-Axis: 0.005mm         |
| 儀器外型尺寸 | Machine Size    | 長x寬x高 8650x320x1830mm(LxWxH)                     | 長x寬x高 650x320x730mm(LxWxH)                       |
| 儀器重量   | Weight          | 57kg   | 55kg   |
| 裝箱尺寸   | Packing Size    | 990x440x1090mm                                   | 990x440x1000mm                                   |
| 裝箱後總重量 | Total Weight    | 110kg  | 105kg  |

本儀器主要適用於搪床、數控加工中心等製造上所使用之搪、銑類切削刀具孔徑及刀長之預調功能。  
The tool pre-setter can be used to pre-set bore and length of the tool working on machine centers or boring machines.




**DH-2200R**

主軸錐度#40或#50  
Main axle's taper is #40 or #50



**DH-1200R**

主軸錐度#40  
Main axle's taper is #40



快速移動裝置  
Rapid traverse equipment



主軸座  
Taper shank turning seat



X軸、Z軸量錶  
X-axis & Z-axis Gages

**高精度・高效率**  
刀具預調儀專業設計・製造  
Professionally Manufactured  
for tool pre-setter

## STANDARD ACCESSORIES 標準配件

1. 測試棒 #50x1支, Ø40mm, 長度200mm/m
2. 百分錶x2只
3. 六角板手x1組
4. 光學尺 (X軸、Y軸) 各1組
1. Test bar #50x1pcs, Ø40mm, length: 200mm/m
2. Dial gage x2 pcs
3. Allen wrench x1 set
4. D.R.O. for X-axis and Y-axis

## OPTIONS 選用配件

1. 工具櫃/車 (尺寸見附圖)
2. #40~#30 轉換套筒
3. #50~#40 轉換套筒
4. #50~#30 轉換套筒
5. #50~HSK63 轉換套筒
6. #50~HSK50 轉換套筒
1. Cabinet/Station (As the attachment)
2. #40~#30 Adapter
3. #50~#40 Adapter
4. #50~#30 Adapter
5. #50~HSK63 Adapter
6. #50~HSK50 Adapter


| 機型     | Model           | DH-2200R   | DH-1200R   |
|--------|-----------------|--|--|
| 測量範圍   | Measuring Range | 直徑 Diameter (X):Ø200mm<br>高度 Height (Z):30~200mm | 直徑 Diameter (X):Ø100mm<br>高度 Height (Z):30~200mm |
| 數顯解析度  | Resolution      | X軸 X-Axis: 0.005mm<br>Z軸 Z-Axis: 0.005mm         | X軸 X-Axis: 0.005mm<br>Z軸 Z-Axis: 0.005mm         |
| 儀器外型尺寸 | Machine Size    | 長x寬x高 550x320x640mm(LxWxH)                       | 長x寬x高 500x320x640mm(LxWxH)                       |
| 儀器重量   | Weight          | 48kg   | 45kg   |
| 裝箱尺寸   | Packing Size    | 830x420x910mm                                    | 800x420x910mm                                    |
| 裝箱後總重量 | Total Weight    | 90kg   | 85kg   |

## FEATURE 特性介紹

1. 超大規格的BT60主軸，搭配可以轉換BT50的襯套，大、小隨心所欲。
2. 獨家的X軸雙線軌設計，快速移動平穩、迅速兼備，耐磨耗、不易變形。
3. 升降Z軸採用高級鋁合金，充分追求輕量化，輔以精密線性滑軌，平行度、垂直度更加精準，大尺寸移動平滑順暢。
4. 底座選用高剛性鋼板，經高溫回火及綿密珠擊，內應力徹底消除，變形量減到最低。
5. 鈹金表面為粉體塗裝，經久耐用，不定期以去漬油擦拭，永保如新。

1. Extra-large the line shaft of BT60 and the BT50 adapter are equipped for switching to different setting sizes as your requirements.
2. The X-arise is equipped with double linear guide way for stable, smooth and fast operation and durable using.
3. Hoist Z-axis column is made of super wear resistant aluminum alloy for being lighter and also equipped with precision linear guide way for precise levelness and verticality for smooth long-distance moving.
4. High rigidity steel plate without any internal stress is used for the base to reduce the deformation to minimum.
5. Keeping the Sheet Metal with powder coating in durable using by wiping out with cleaning naphtha.

| 機型                | Model                         | DH-1280   |
|-------------------|-------------------------------|---|
| 測量範圍              | Measuring Range               | 直徑 Diameter (X):0~Ø1200mm<br>高度 Height (Z):50~800mm       |
| 數顯解析度             | Resolution                    | X軸 X-Axis: 0.005mm<br>Z軸 Z-Axis: 0.005mm                  |
| 儀器外型尺寸            | Machine Size                  | 長x寬x高 1250x400x1360mm(LxWxH)                              |
| 工具櫃尺寸 (選配)        | Cabinet Size (Optional)       | 長x寬x高 1300x520x600mm(LxWxH)                               |
| 工具櫃重量             | Power weight                  | 60kg  |
| 60 # 測試棒重量        | Test bar weight               | 13kg  |
| 60 # 轉換50#襯套 (選配) | 60 # -50 # Adapter (Optional) | 4.5kg   |
| 電源                | Power supply                  | AC 110/220V 50Hz/60Hz                                     |
| 儀器重量              | Weight                        | 155kg   |
| 裝箱尺寸              | Packing Size                  | 1600x600x1600mm   |
| 裝箱後總重量            | Total Weight                  | 233kg (儀器x測試棒x木箱)<br>(Tool pre-setter+test bar+wood case) |

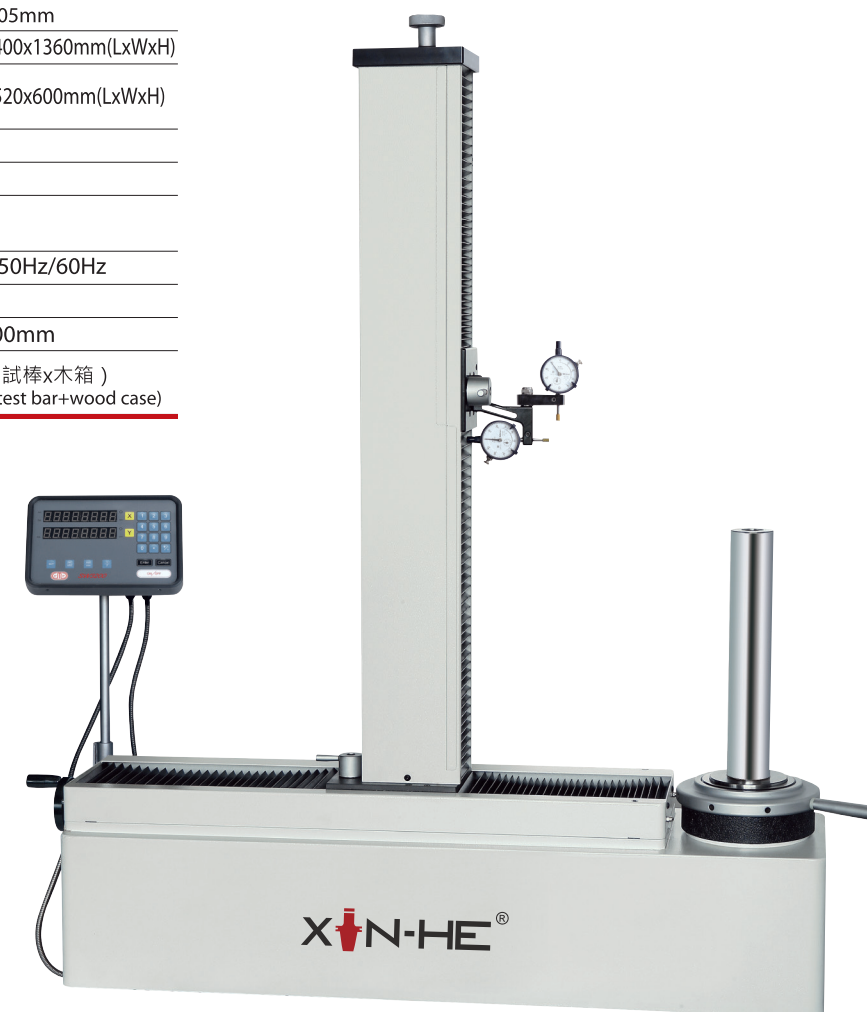

客製化產品

**DH-1280**

Customized Products